

# QUESTIONS & ANSWERS

Kill your exam at first Attempt

75940X Dumps  
75940X Braindumps  
75940X Real Questions  
75940X Practice Test  
75940X dumps free



**Avaya**

# 75940X

*Avaya Converged Platform Integration*



<https://killexams.com/pass4sure/exam-detail/75940X>

QUESTION 55  
Refer to the exhibit.

⏪

Services

vSphere DRS

vSphere HA

Virtual SAN

General

Disk Management

Configuration

General

Virtual SAN Licensing

VMware EVC

DRS Groups

**DRS Rules**

VM Overrides

Host Options

Profiles

DRS Rules

Add...Edit...Delete

Name	Type	Enabled	Conflicts	Defined...
SMRule	Separate Virtual Machines	Yes	0	User
MSCRule	Run VMs on Hosts	Yes	0	User
CMRule	Separate Virtual Machines	Yes	0	User

DRS Rule Details

The listed 2 Virtual Machines must run on different hosts.

Add...Details...Remove

Rule Members	Conflicts
SC-Avaya Aura Session Ma...	0
SC-Avaya Aura Session Ma...	0

Conflicts


What is the purpose of the “SMRule” DRS rule that states the two Avaya Aura® Session Managers must run off different ESXi hosts?

- A. To improve the latency of DRS load-balancing
- B. To prevent a single ESXi host from being overloaded with SIP traffic
- C. To preserve seamless failover/recovery across primary and secondary Session Managers
- D. To reduce the memory and CPU load on a single ESXi host

Correct Answer: C

QUESTION 56  
Using VMware networking in ACP 4200, how are Virtual NICs mapped to physical NICs?

- A. Via DRS rules
- B. On a 1-to-1 basis
- C. Via Virtual Switches and Port Groups
- D. Via the VNIIC mapping tables


Correct Answer: D

**QUESTION 57** Which statement about all hosts in the cluster describes a system requirement for VMware vMotion in ACP 4200?

- A. They must be the same server type.
- B. They must have matching Memory capacity.
- C. They must have matching CPU types.
- D. They must have matching VMware network settings.

**Correct Answer:** C

**QUESTION 58**  
Refer to the exhibit.

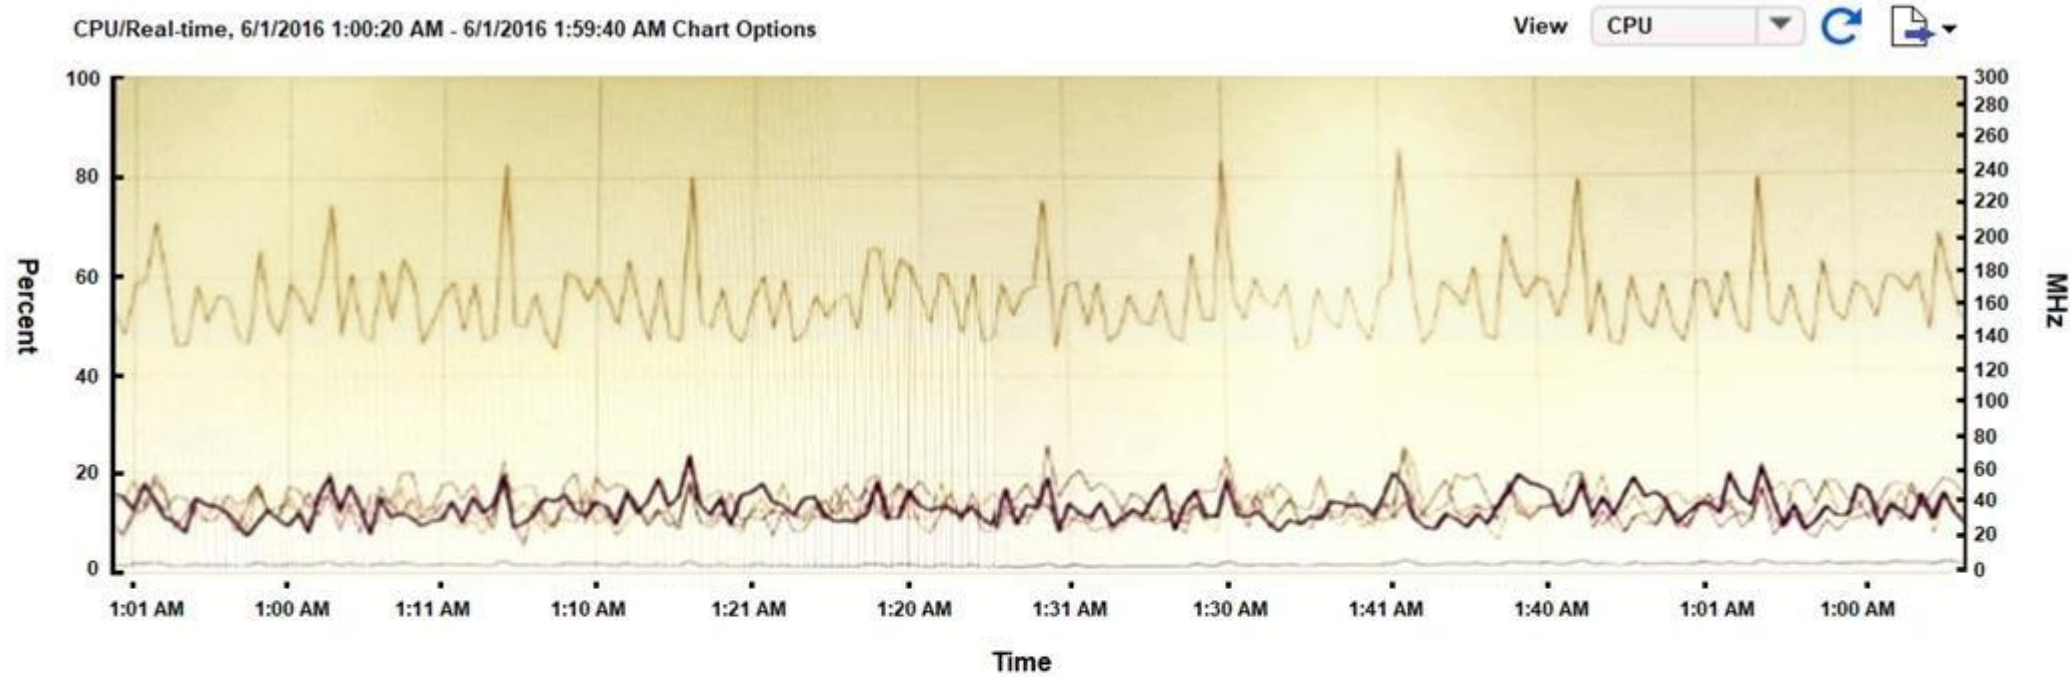

Performance Chart Legend

Key	Object	Measurement	Rollup	Units	Latest	Maximum	Minimum	Average
Blue	AVAYA SMGR 7.0 POS Tea...	Usage	Average	Percent	1.45	2.48	1.3	1,594
Red	1	Usage in MHz	Average	MHz	30	71	16	38,397
Yellow	AVAYA SMGR 7.0 POS Tea...	Usage in MHz	Average	MHz	151	257	135	156,509
Grey	0	Usage in MHz	Average	MHz	40	78	21	40,844
Green	3	Usage in MHz	Average	MHz	38	77	19	38,335
Purple	2	Usage in MHz	Average	MHz	35	71	22	39,285

Why is the usage measurement of CPU2 (in Purple) shown in the chart highlighted in the table?

- A. Because the CPU2 has been nominated as the primary CPU in this Virtual Machine.
- B. Because the CPU2 has been highlighted with an active alarm.
- C. Because the CPU2 usage is closest to the average usage of all the CPUs.
- D. Because the CPU2 has been selected in the table under the chart.

**Correct Answer:** D

**QUESTION 59** Which two are valid levels of VMware performance monitoring?  
(Choose two.)

- A. Visualization Performance and Fault Manager (VPFM)
- B. Virtual Machine (VM)
- C. Data Center (DC)
- D. Host

**Correct Answer:** BD

**QUESTION 60** Why does enabling VMware Enhanced vMotion Compatibility (EVC) prevent vMotion migrations from failing?

- A. Because of incompatible DRS rules across the cluster
- B. Because of incompatible HA rules across the cluster
- C. Because of insufficient memory across the cluster
- D. Because of incompatible CPUs across the cluster

**Correct Answer:** D

**QUESTION 61** The customer's networking team is considering connectivity options to the ACP 4200.

For which customers would an ACP 4200 Layer 2-only networking topology be deployed, and why?

- A. Customers who have a Layer 2 Data Center. The ACP will provide Layer 3 routing for the customer.
- B. Customers who wish to retain existing VLANs, subnets, and IP subnets. The ACP will extend VLANs out to the Data Center routers which will provide Layer 3 routing.
- C. Customers who do not use Dynamic routing protocols. The ACP will use static routes for connectivity to the Data Center.
- D. Customers who wish to upgrade their Data Center to Fabric Connect. The ACP will use Fabric Extend to integrate with the customer's Data Center switches.

**Correct Answer:** D




**QUESTION 62** When a Layer 2-only networking topology is deployed, what is the behavior of the ACP 4200?

- A. It will support only a single management VLAN.
- B. It will extend VLANs out to the Data Center routers which will provide Layer 3 routing.
- C. It will support only a single application VLAN.
- D. It will have 802.1Q tagging enabled on all ports of the VSP switches.

**Correct Answer: B**

**QUESTION 63**

Refer to the exhibit.

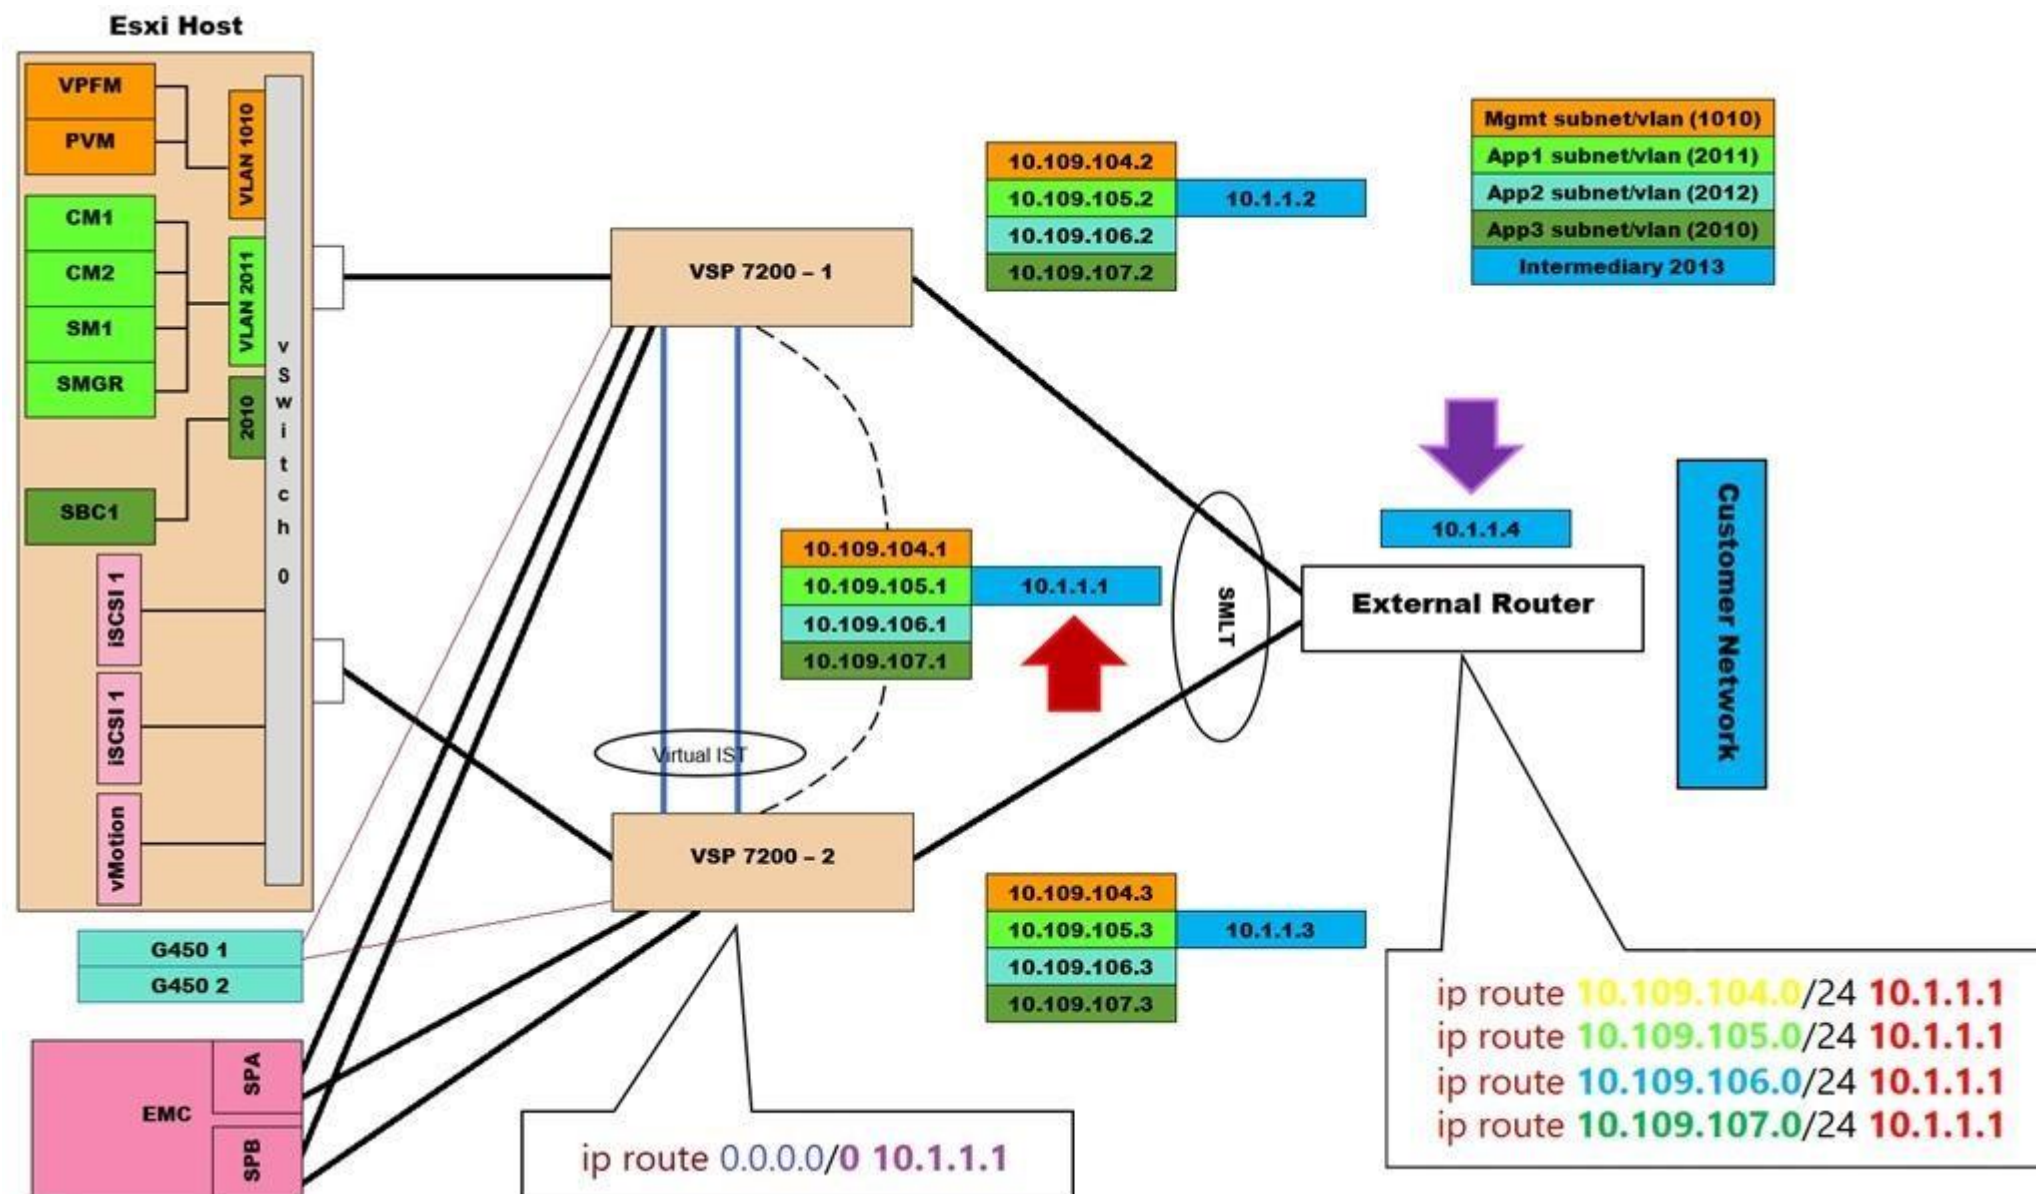

What does the IP address 10.1.1.1 represent?

- A. The IP address of the EMC storage

- B. The SMLT IP address of the two VSP 7200 switches
- C. The Virtual IST IP address of the two VSP 7200 switches
- D. The VRRP IP address of the two VSP 7200 switches

**Correct Answer:** D

**QUESTION 64** Which statement describes a feature of VMware HA?

- A. It adds VPFM as a SNMP management server.
- B. It detects host failures and starts applications on other hosts in the cluster.
- C. It monitors the memory and CPU load on the host servers and balances them by moving VMs between the hosts.
- D. It moves a running VM from one host to another.

**Correct Answer:** B

Reference: [https://www.vmware.com/pdf/vmware\\_ha\\_wp.pdf](https://www.vmware.com/pdf/vmware_ha_wp.pdf)

For More exams visit <https://killexams.com/vendors-exam-list>



*Kill your exam at First Attempt....Guaranteed!*