

# QUESTIONS & ANSWERS

Kill your exam at first Attempt



DES-5121 Dumps  
DES-5121 Braindumps  
DES-5121 Real Questions  
DES-5121 Practice Test  
DES-5121 dumps free



**DELL**

# DES-5121

*Specialist – Implementation Engineer, Campus Networking*

<https://killexams.com/pass4sure/exam-detail/DES-5121>



**QUESTION 57** If VoIP traffic uses multiple QoS prioritization schemes, what refers to VoIP traffic?

- A. COS 2, DSCP 22, AF B.
- COS 2, DSCP 46, EF C.
- COS 5, DSCP 42, AF
- D. COS 5, DSCP 46, EF

**Correct Answer:** D

**QUESTION 58** In order to alter a packet's routing direction, which packet layers can policy-based routing use?

- A. Transport, Network, Link Layer, and Physical
- B. Link Layer, Physical, Presentation, and SessionC. Network, Link Layer, Physical, and Session
- D. Application, Transport, Network, and Link Layer

**Correct Answer:** A

**QUESTION 59** A network administrator wants to configure an ACL to deny traffic for a specific source IP and source UDP port.

Which type of ACL should be used?

- A. Layer 2 Standard ACL
- B. Layer 2 Extended ACL
- C. Layer 3 Standard ACL
- D. Layer 3 Extended ACL

**Correct Answer:** D

**QUESTION 60** How does the weighted Queue Scheduler prioritize packets?

- A. Scheduler prioritizes weighted queues over any strict queues
- B. Weights are calculated based on the number of packets
- C. Weights are used to calculate the number of bytes
- D. Weight is assigned to each port

**Correct Answer:** C

Reference: <https://infohub.delltechnologies.com/static/media/6582046d-70f0-4ab6-ba72-2c0b9cf26649.pdf> page 6

**QUESTION 61** Which packet characteristics can policy-based routing be configured to match against?

- A. TTL, TCP Port, and L3 Packet Length
- B. L3 Packet Length, TTL, and 802.1p Priority
- C. TCP Port, L3 Packet Length, and 802.1p Priority
- D. TCP Port, TTL, and 802.1p Priority

**Correct Answer: C**

**QUESTION 62** Which spanning tree feature will prevent unnecessary timeouts from DHCP servers?

- A. PortFast
- B. Loop Guard
- C. BPDU Flooding
- D. Root Guard

**Correct Answer: A**

Reference: <https://www.dell.com/community/Networking-General/Advice-on-basic-STP-and-network-design/td-p/4434346>

**QUESTION 63** Refer to the Exhibit.


```
Switch-1(config)# radius server host 10.1.1.111
Switch-1(config-radius)# key "secretkey"
Switch-1(config-radius)# exit
Switch-1(config)# aaa authentication login "LOCAL-AUTH" local
Switch-1(config)# aaa authentication login "REMOTE-AUTH" radius local
Switch-1(config)# aaa authentication enable "REMOTE-AUTH" radius enable
Switch-1(config)# aaa authentication login default tacacs local
Switch-1(config)# aaa authentication enable default tacacs enable
Switch-1(config)# line telnet
Switch-1(config-telnet)# login authentication "REMOTE-AUTH"
Switch-1(config-telnet)# exit
Switch-1(config)# line ssh
Switch-1(config-ssh)# login authentication default
Switch-1(config)# exit
Switch-1(config)# line console
Switch-1(config-line)# login authentication "LOCAL-AUTH" Switch-1(config-
line)# exit
```

Which authentication method will be used if a user tries to log into the switch when accessing through SSH?

- A. RADIUS, then fails over to a local user account
- B. Local user account
- C. TACACS, then fails over to a local user account
- D. None

Correct Answer: C

QUESTION 64

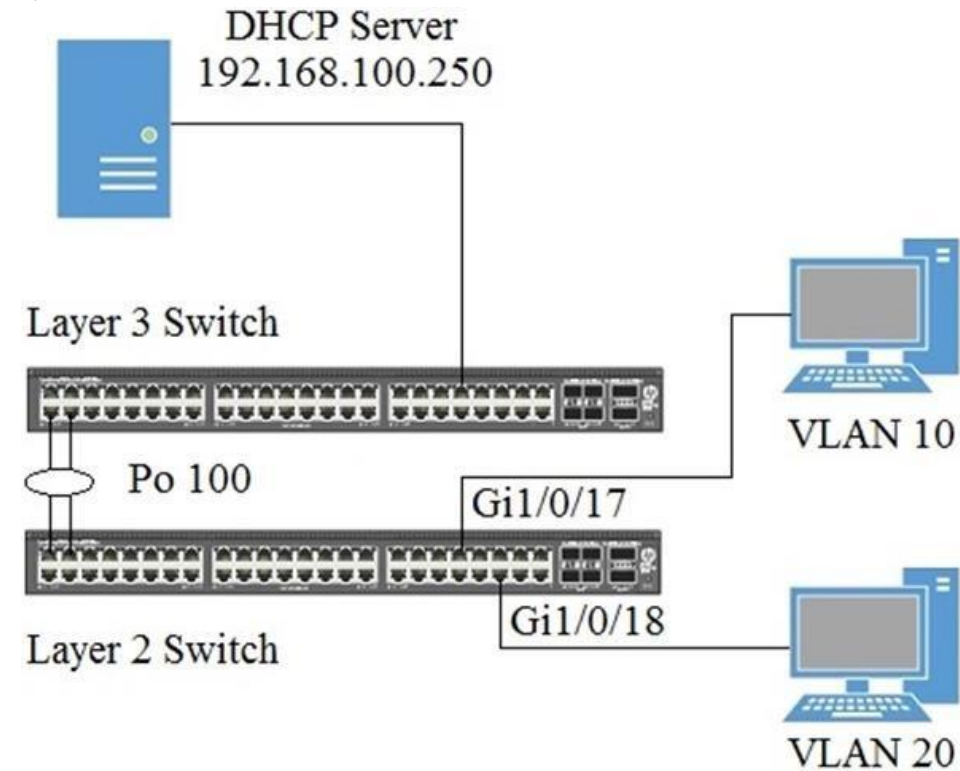

Based on the exhibit, which configuration on interface Gi1/0/18 will allow the DHCP request to reach the DHCP server for the specified VLAN?

**A. Configuration A:**

```
console(config-if-Gi1/0/18)# switchport mode general console(config-if-Gi1/0/18)# switchport general pvid 20 console(config-if-Gi1/0/18)# switchport general allowed vlan add 20 console(config-if-Gi1/0/18)# switchport general allowed vlan remove 1
```

**B. Configuration B:**

```
console(config-if-Gi1/0/18)# switchport access vlan 10 console(config-if-Gi1/0/18)# service-policy in dhcp_250 console(config-if-Gi1/0/18)# switchport general allowed vlan add 20 console(config-if-Gi1/0/18)# switchport general allowed vlan remove 1
```

**C. Configuration C:**

```
console(config-if-Gi1/0/18)# switchport access vlan 10 console(config-if-Gi1/0/18)# ip dhcp snooping trust console(config-if-Gi1/0/18)# switchport general allowed vlan add 20 console(config-if-Gi1/0/18)# switchport general allowed vlan remove 1
```

**D. Configuration D:**

```
console(config-if-Gi1/0/18)# channel-group 100 mode active console(config-if-Gi1/0/18)# switchport access vlan 250 console(config-if-Gi1/0/18)# switchport general allowed vlan add 20 console(config-if-Gi1/0/18)# switchport general allowed vlan remove 1
```

**Correct Answer: A**

**QUESTION 65** How many untagged VLANs are allowed on a switchport mode trunk interface?

- A. 0
- B. 1
- C. 128
- D. 4096

**Correct Answer:** B

For More exams visit <https://killexams.com/vendors-exam-list>



*Kill your exam at First Attempt....Guaranteed!*